
	LEGEND		
W	CLEAR OPENING WIDTH		
Н	CLEAR OPENING HEIGHT		
Χ	WALL THICKNESS		
В	SPACE REQUIRED		
С	RETURN SPACE		
RO	ROUGH OPENING WIDTH		
ROH	ROUGH OPENING HEIGHT		

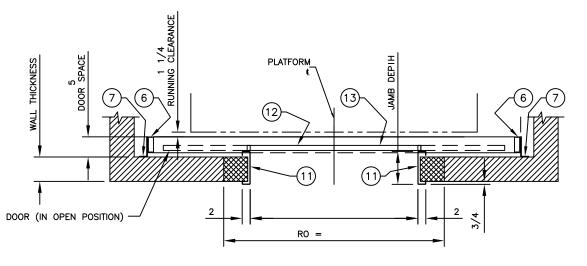

SILL =


[ALL DIMENSIONS IN INCHES]
DRAWING NOT TO SCALE

FASCIA

BOLTED VISIBLE SEAM


\_KEYHOLE AT EACH FLOOR

C =

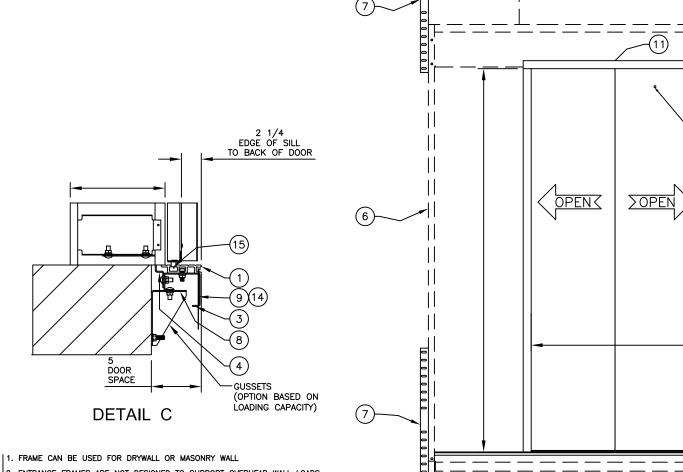

- ENTRANCE FRAMES ARE NOT DESIGNED TO SUPPORT OVERHEAD WALL LOADS.
- 3. SUITABLE SUPPORT FOR THESE LOADS MUST BE PROVIDED BY OTHERS.
- 4. ENTRANCES ARE UL LABELED. 1 1/2 HOUR (MINIMUM) RATING.
- 5. ENTRANCES ARE PRE-DRILLED FOR GAL EQUPMENT.

6. IT IS RECOMMENDED THAT THE ENTRANCE WALL BE LEFT OPEN UNTIL DOOR FRAMES AND SILLS ARE SET IN PLACE IF THIS IS NOT POSSIBLE THEN A ROUGH OPENING MUST BE PROVIDED THAT IS 2'-O" WIDER AND 6" HIGHER THAN DOOR OPENING. WALL IS TO BE COMPLETED AND SILLS AND FRAMES AS REQUIRED ARE TO BE GROUTED BY OTHERS AFTER ENTRANCES ARE INSTALLED IN PLACE.

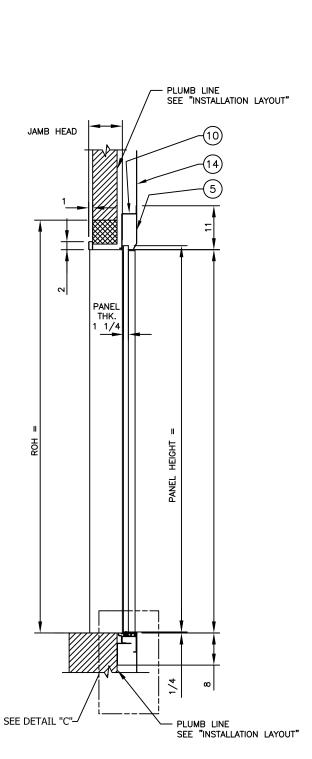

ITEM	BILL OF MATERIALS	MATERIAL	FINISH	QTY
1	SILL EXTRUDED	See Estimate		1
2	STRUT KNEE (NOT SHOWN)	12GA	GALV	4
3	SILL SUPPORT	12GA	GALV	1
4	JAMB BRACKET	12GA	GALV	2
5	HANGER COVER	16GA	GALV	1
6	STRUT	12GA	GALV	2
7	TIE ANGLE	12GA	GALV	4
8	GROUT RETAINER	12GA	GALV	1
9	TOE GUARD	16GA	GALV	1
10	HEADER_PSD	12GA	GALV	1
11	FRAME	See Estimate		1
12	DOOR ASSEMBLY	See Estimate		1
13	DOOR ASSEMBLY	See Estimate		1
14	FASCIA STARTER	16GA	GALV	1
15	DOOR GIBS	-		1
16	DUST COVER (NOT SHOWN)	16GA	GALV	1
	HARDWARE INSTALLA	TION KIT		
17A	PSD DOOR PANEL HARDWARE (INCLUDING GIBS & RETAINERS)	560028	ı	2
17B	PSD ENTRANCE HARDWARE CO	560027	-	1
17C	SIGHT GUARD HARDWARE	560025	-	2
17D	FASCIA HARDWARE	560026		1
17E	PSD ANCHOR HARDWARE	560023	-	1
17F	DOOR ASTRAGAL	560018	-	2

## **FOR APPROVAL**

	MATERIAL & FINISH	
OOR FACE FINISH	See Estimate	
OOR BACK FINISH	See Estimate	
FRAME FINISH	See Estimate	
SILL MATERIAL	See Estimate	
QUANTITY BREAKDOWN		

QUANTITY BREAKDOWN			
QTY - See Estimate	1CO-W x H		

4	ים קט	

PSD ENTRANCE 1CO

BUILDING		
LOCATION		
ELEV. NO:		APPROVED BY:
SHEET 1 OF 1	DATE:	JOB #: